


# UNIX

## 2MP LPR Bullet Network Camera

UX-C2664PB



### Key Features

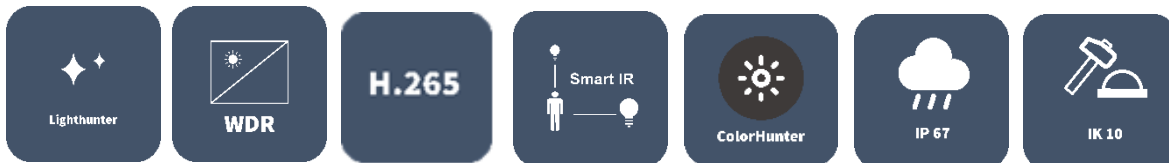

- High quality image with 1/2.8" 2MP Sony STARVIS CMOS
- 1920\*1080@60fps in the main stream
- H.265, H.264, MJPEG
- Support Capturing car license picture when the car passes tripwire
- Support humanoid detection, motion detection
- Colorful technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- 6 mixed-lights, up to 50m warm light
- DC12V or PoE (IEEE 802.3at) power supply
- 16mm optical Fix ZOOM process
- Support ONVIF and HIK/XM protocol
- IP67,IK10

## Specifications

Model	UX-C2664PB-12 mm	UX-C2664PB-16 mm
<b>Camera</b>		
Max Resolution	2 MP	
Sensor	1/2.8" CMOS	
Min. Illumination	Colour: 0.001lux @F1.0(Color)	
Day/Night	IR-cut filter with auto switch (ICR)	
Shutter	Auto/Manual, 1 ~ 1/100000s	
Adjustment Angle	14°(farfocus)	
S/N	≥50dB (AGC OFF)	
WDR	WDR 120 db	
<b>Lens</b>		
Focal Length	12 mm	16 mm
Iris Type	Fix	
Iris	F2.36	
Autofocus / Zoom	No	
Web Configuration	Yes	
<b>Illuminator</b>		
Supplemental Light	Warmlight	
Illumination Distance (IR)	60 m	
WarmLight On/Off Control	Auto/Manual	

Video	
Video Compression	H.265, H.264
H.264 Code Profile	Baseline profile, Main profile, High profile
Frame Rate	Main Stream: 1920 × 1080/ 1280x960/ 1280x720@60fps Sub Stream: 640x480/480x360/352x288/176x144@60fps
Video Bit Rate	128 Kbps to 6144 Kbps
Video Stream	Dual Streams
Image	

White Balance	Auto, Outdoor, Fine Tune, Sodium Lamp, Locked, Auto2
Digital Noise Reduction	2D/3D DNR
Smart WarmLight	Support
Flip	Normal, Flip Vertical, Flip Horizontal, 180°
Dewarping	N/A
HLC	Support
BLC	Support
Defog	Digital Defog

Events	
Basic Detection	Motion Detection
General Function	Watermark, IP Address Filtering, Access Policy, ARP Protection, RTSP Authentication, User Authentication, HTTP Authentication

Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, UPnP, HTTP, HTTPS, QoS, SSL/TLS
Compatible Integration	ONVIF (Profile S, Profile T) , API, SDK
User/Host	Up to 32 users, 2 user levels: administrator and common user


# UNIX

Security	Password Protection, Strong Password, HTTPS Encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, WSSE and Digest Authentication for ONVIF
Web Browser	Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+, Plug-in free live view: Chrome 57+, Firefox
<b>Interface</b>	
Audio I/O	N/A
Alarm I/O	N/A
Serial Port	N/A
Built-in Mic	N/A
Built-in Speaker	N/A
WIFI	N/A
Network	1ch 10/100 BaseT Ethernet,RJ45 interface
Video Output	N/A
<b>Certification</b>	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035) FCC (FCC 47 CFR part15 B)
Safety	CE LVD (EN 62368-1) CB (IEC 62368-1) UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)
Environment	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU);
Protection	IP67 (IEC 60529) IK10 (IEC 62262)
<b>General</b>	
Power	DC 12V±25%, PoE (IEEE 802.3af)
Power Consumption	Max 8.0W
Dimensions	∅245 x 85mm
Weight	0.68kg
Material	Metal
Working Environment	-30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)

# UNIX

Storage Environment	-30 °C to 60 °C (-22 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)
Surge Protection	4 KV
Reset Button	N/A

## Dimensions


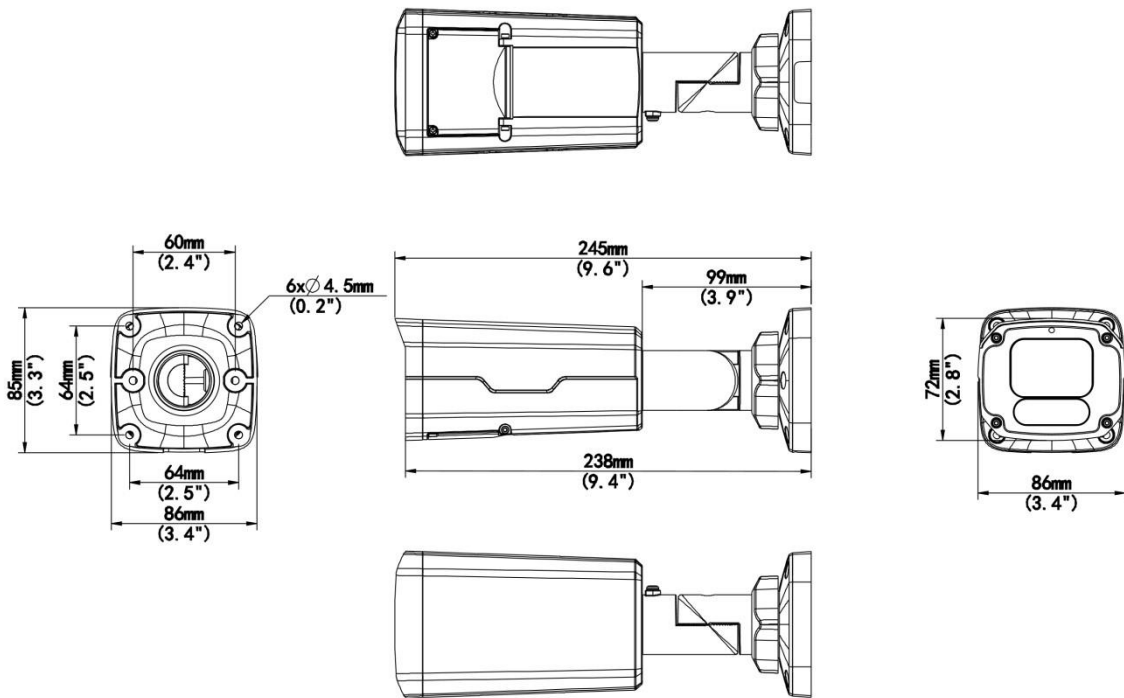



## Accessories

TR-UP06-C-IN

Pole Mount

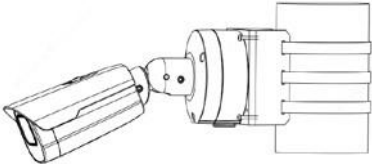

Pole Mount	Wall mount
TR-UP06-C-IN	/
	
Pendant mount	
/	

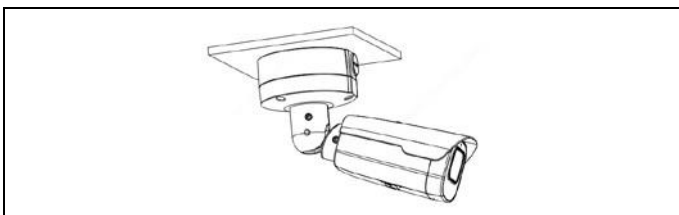

**Unix Technologies Co., Ltd.**

Hangzhou City, 615051, Zhejiang Province, China

Email: [overseasbusiness@unix.com](mailto:overseasbusiness@unix.com)

©2023 Zhejiang Unix Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.